

InfraRed Thermometer IRT-1001

APPLICATIONS & FEATURES

Wide range application:

Food preparation, Safety and Fire inspectors, Plastic molding, Asphalt, Marine and screen printing, measure ink and dryer temperature, Diesel and Fleet maintenance.

Field of View

Meter's field of view is 10:1, meaning that if the meter is 10 inches from the target, the diameter of the object under test must be at least 1 inch. Other distances are shown below in the field of view diagram. Refer to the chart printed on the meter for more information.


Features:

- Precise non-contact measurements
- Built-in laser pointer
- Automatic selection range and Resolution to 0.1° or 1°
- °F/°C switchable button
- Automatic Data Hold & Auto power off
- The meter at 10 inches away measure 1 inch target
- Backlit LCD display
- MAX/MIN temperature measurement Function



IRT1001 comes with following accessories:

- 9 Volt battery
- Soft case

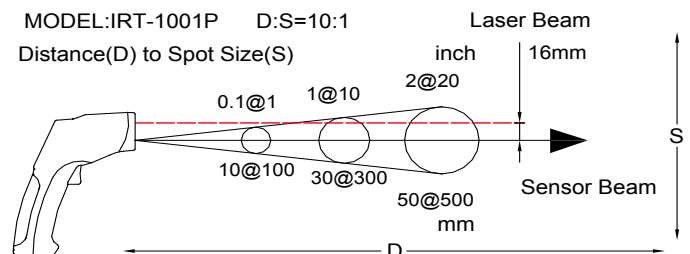

SPECIFICATIONS

General specifications

MEAS. RANGES	-50.0°C to 760.0°C/-58.0°F to 1400°F
SAMPLE RATE	Less than 1 second
OVER RANGE INDICATION	LCD will show "OL" and "-OL"
POLARITY	Automatic (no indication for positive polarity); Minus (-) sign for negative polarity.
EMISSIVITY	0.95 fixed value
FIELD OF VIEW	D/S = Approx. 10:1 ratio (D = distance, S = spot) (Has 80% encircled energy at the focal point)
DIODE LASER	Output <1mW, Wavelength 630-670nm, class 2 (II) Laser product
SPECTRAL RESPONSE	6-14um
POWER OFF	Automatic shut off after 7 seconds, approx.
OPERATING TEMP.	0°C to 50°C (32°F to 122°F)
STORAGE TEMP.	-20°C to 60°C (-4°F to 140°F)
RELATIVE HUMIDITY	10%-90%RH operating, <80%RH storage
POWER SUPPLY	9V battery, NEDA 1604A or IEC 6LR61, or equivalent
WEIGHT	180g.
SIZE	82 x 41.5 x 160mm

Infrared thermometer specifications

Range	Resolution	Accuracy
-50.0°C to 760.0°C	0.1°C	± 5°C;
		± 2% of reading or ± 2°C;
		± 2.5% of reading ± 2°C

Range (Automatic selection 0.1°F / 1°F)	Resolution	Accuracy
-58.0°F to 1400°F	0.1°F	± 9°F;
		± 2% of reading or ± 4°F;
	1°F	± 2.5% of reading ± 4°F;

Note:

Accuracy is given at 18°C to 28°C (64°F to 82°F), less than 80%RH.

Field of View:

Make sure that the target is larger than the unit's spot size. The smaller the target, the closer you should be to it. When accuracy is critical, make sure the target is at least twice as large as the spot size.

Emissivity:

0.95 fixed value